


Sash Screw Fitting Instructions

Product Data:

Manufactured from Brass with a Steel Threaded Bar. Supplied in 3 Lengths of Thread = 50mm, 76mm or 102mm. Due to the nature of the manufacturing process, a tolerance of + / - 5% must be allowed on the weight and dimensions of this product.

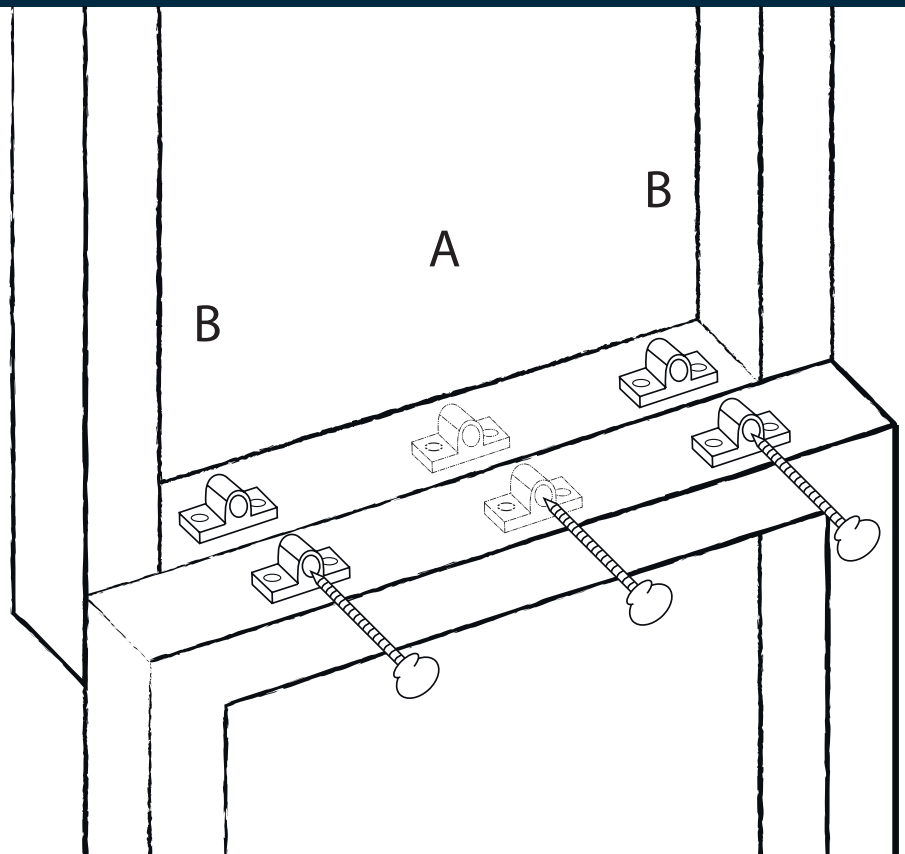

Installation of the Product:

Surface Mounted Version

You can fit either one Sash Screw in the middle of the sash (A) if used instead of a Sash Fastener or two at either side (B).

Make sure the unthreaded mounting plate is fitted onto the Sash Screw first followed by the threaded mounting plate.

Make sure the window is in the locked position.

Place the product in your chosen location (A or B).

First using the threaded mounting plate, place it on the top face of the bottom meeting rail of the top sash window marking through the screw holes and then make a pilot hole and fix the mounting plate.

Secondly place the unthreaded mounting plate centralised on the top face of the meeting rail on the bottom sash window, as previously mark, make a pilot hole and then fix the mounting plate.

(Note : Make sure you do not over screw the Sash Screw as it may crack or break the glass in the top sash). **If you are unsure how to fit the product we advise you contact a qualified trades person.**

These instructions have been supplied as a guide only and we cannot take any responsibility for problems which may arise during the fitting of the Sash Screw.

Make It Once... Make It Mighton...

